



浩畅半导体  
www.szhaochang.cn

1SS226 SWITCHING DIODE

SOT-23 Plastic-Encapsulate Diodes

产品规格书 承认书

客户确认:				公司签章:
部门	工程部	品保部	采购部	
签名				
日期				





## SOT-23 Plastic-Encapsulate Diodes

### 1SS226 SWITCHING DIODE

#### FEATURES

- Low forward voltage
- Fast reverse recovery time
- Small total capacitance

#### MARKING: C3

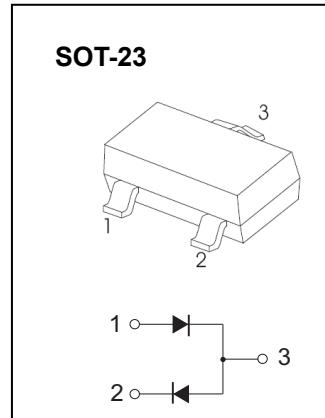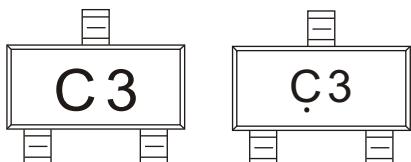

Solid dot = Green molding compound device, if none, the normal device.





#### Maximum Ratings ,Single Diode @Ta=25°C

Parameter	Symbol	Limit	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	85	V
Peak Repetitive Peak Reverse Voltage	V <sub>RRM</sub>		
Working Peak Reverse Voltage	V <sub>RWM</sub>	80	V
DC Blocking Voltage	V <sub>R</sub>		
Forward Continuous Current	I <sub>FM</sub>	300	mA
Average Rectified Output Current	I <sub>O</sub>	100	mA
Non-Repetitive Peak Forward Surge Current @t=8.3ms	I <sub>FSM</sub>	2	A
Power Dissipation	P <sub>D</sub>	150	mW
Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	833	°C/W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature	T <sub>STG</sub>	-55~+150	°C




#### ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Reverse breakdown voltage	V <sub>(BR)</sub>	I <sub>R</sub> = 100uA	80		V
Reverse voltage leakage current	I <sub>R</sub>	V <sub>R</sub> =80V		0.5	uA
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =100mA		1.2	V
Diode capacitance	C <sub>D</sub>	V <sub>R</sub> =0V, f=1MHz		3	pF
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =10mA		4	ns

## Typical Characteristics

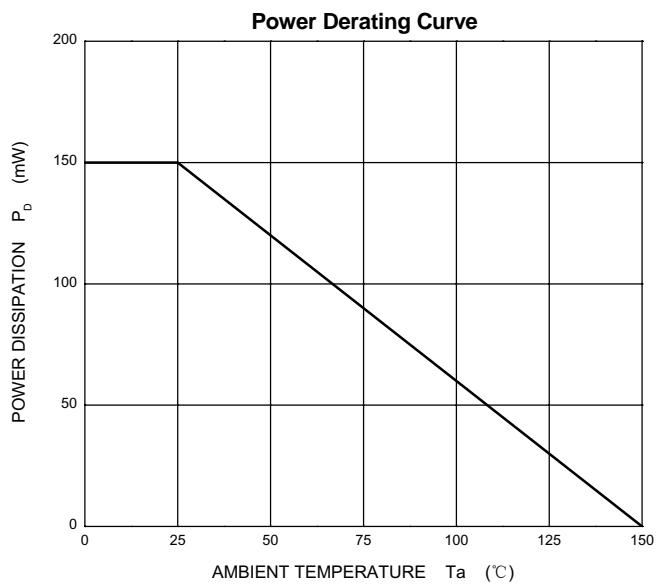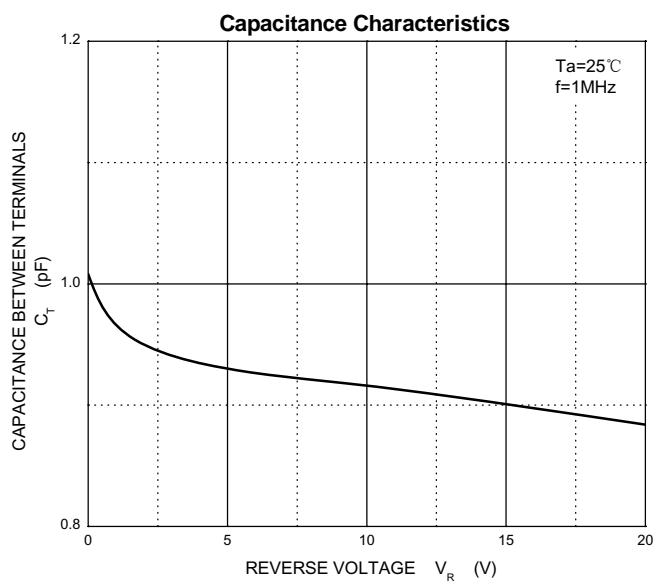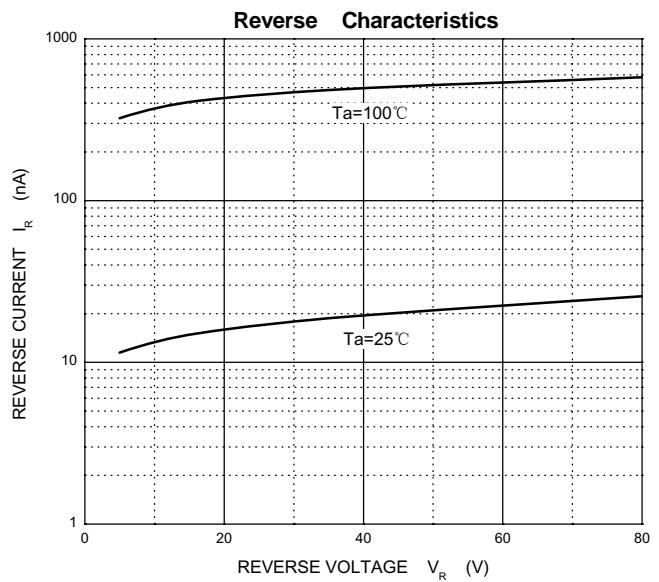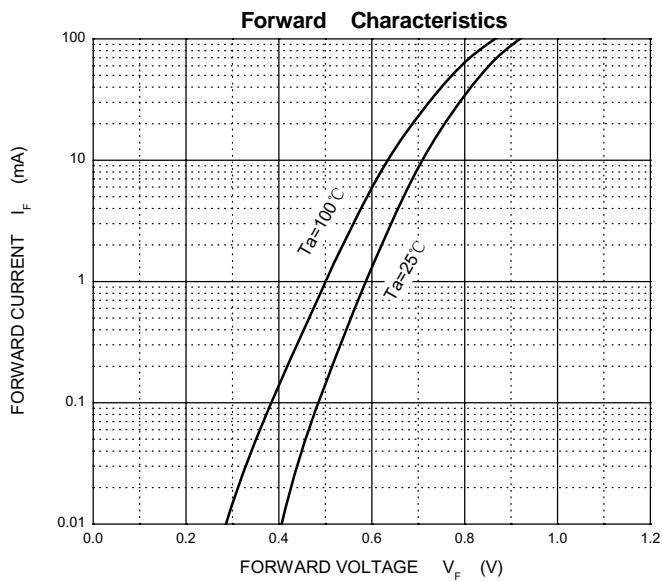


## SOT-23 Package Outline Dimensions

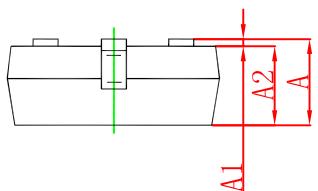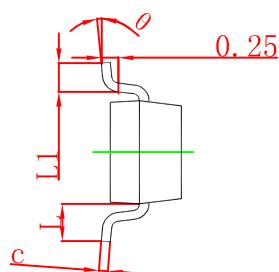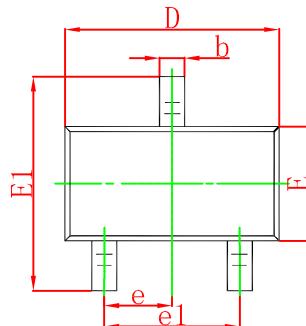

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP		0.037 TYP	
e1	1.800	2.000	0.071	0.079
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

## SOT-23 Suggested Pad Layout

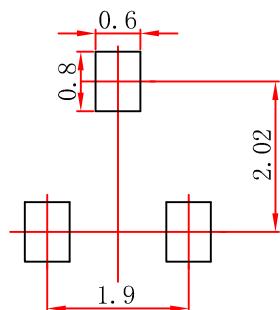

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.