



浩畅半导体
www.szhaochang.cn

78L09 Three-terminal positive voltage regulator

SOT-89 Encapsulate Three Terminal Voltage Regulator

产品规格书 承认书

客户确认:				公司签章:
部门	工程部	品保部	采购部	
签名				
日期				

SOT-89 Encapsulate Three Terminal Voltage Regulator


78L09 Three-terminal positive voltage regulator

FEATURES**Maximum output current** I_{OM} : 0.1 A**Output voltage** V_o : 9 V**Continuous total dissipation** P_D : 0.5W**SOT-89-3L**

1.OUT

2.GND


3.IN

**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55 ~+150	°C







ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($(V_i=16V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Output voltage	V_o		25°C	8.64	9.0	V
		12V≤ V_I ≤24V, $I_o=1mA-40mA$	0-125°C	8.55	9.0	9.45
		$I_o=1mA-70mA$		8.55	9.0	V
Load Regulation	ΔV_o	$I_o=1mA-100mA$	25°C	19	90	mV
		$I_o=1mA-40mA$	25°C	11	40	mV
Line regulation	ΔV_o	12V≤ V_I ≤24V	25°C	45	175	mV
		13V≤ V_I ≤24V	25°C	40	125	mV
Quiescent Current	I_q		25°C	4.1	6.0	mA
Quiescent Current Change	ΔI_q	13V≤ V_I ≤24V	0-125°C		1.5	mA
	ΔI_q	1mA≤ I_o ≤40mA	0-125°C		0.1	mA
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C	58		uV
Ripple Rejection	RR	15V≤ V_I ≤25V, f=120Hz	0-125°C	45		dB
Dropout Voltage	V_d		25°C	1.7		V

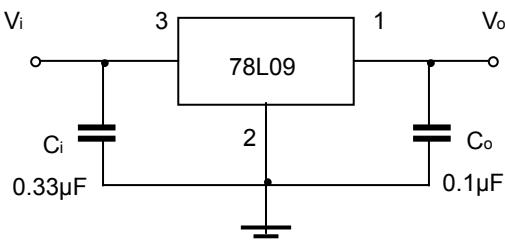
TYPICAL APPLICATION

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

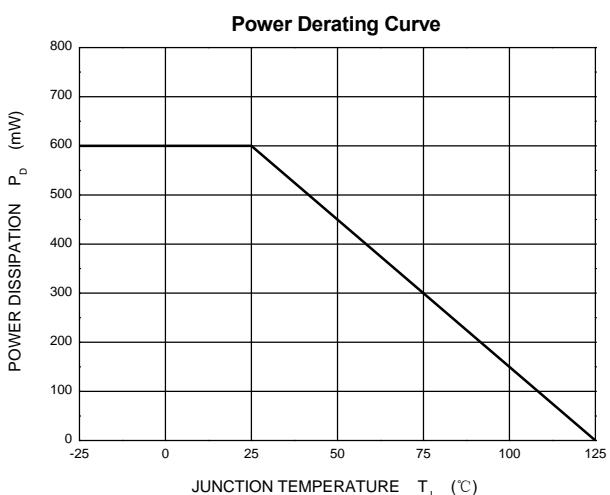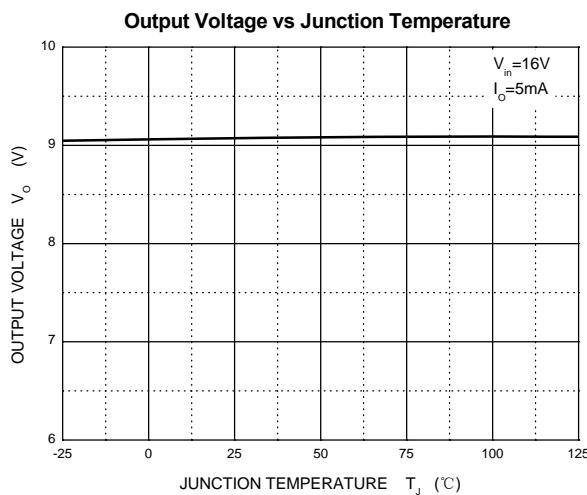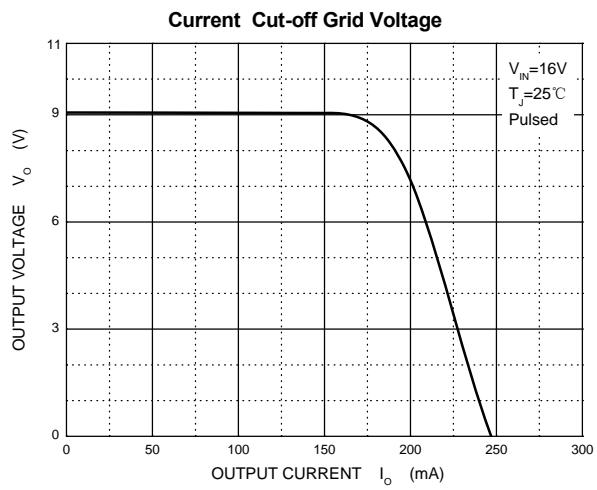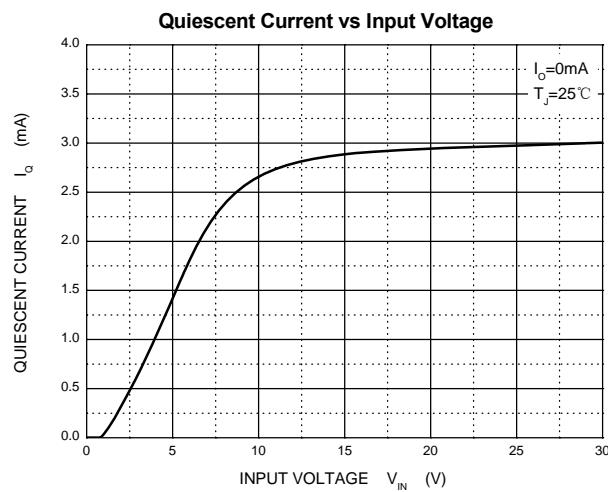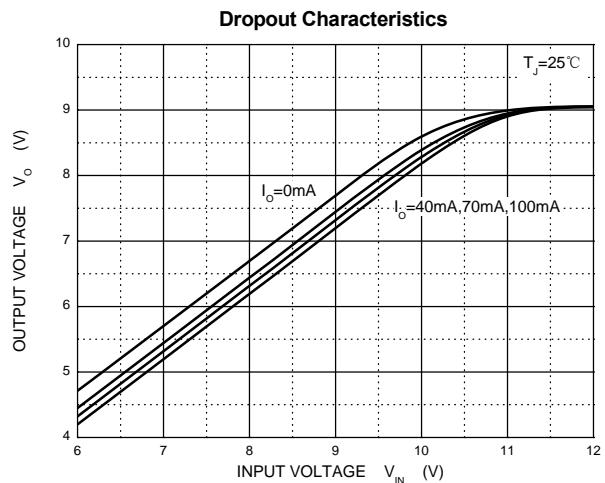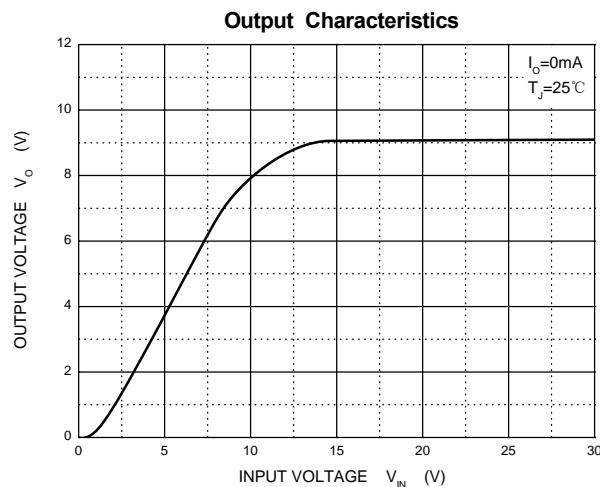


SOT-89-3L Package Outline Dimensions

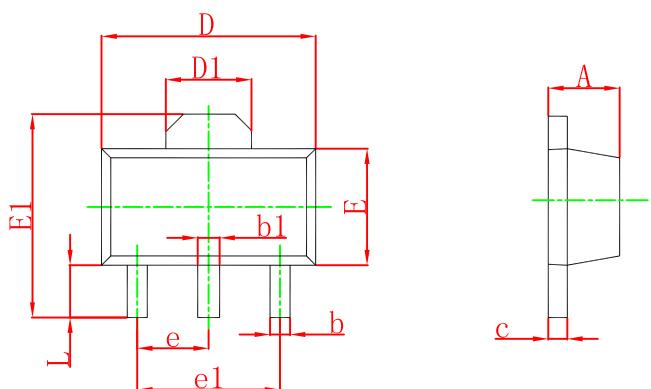

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047

SOT-89-3L Suggested Pad Layout

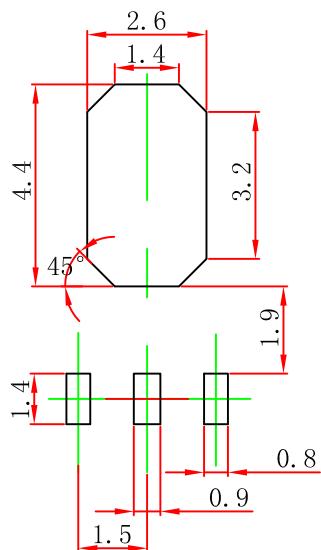

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.