



浩畅半导体
www.szhaochang.cn

78L05 Three-terminal positive voltage regulator


TO-92 Encapsulate Three Terminal Voltage Regulator

产品规格书 承认书

客户确认:				公司签章:
部门	工程部	品保部	采购部	
签名				
日期				

TO-92 Encapsulate Three-terminal Voltage Regulator**78L05** Three-terminal positive voltage regulator**FEATURES**Maximum Output current I_O : 0.1 AOutput voltage V_o : 5 V


Continuous total dissipation

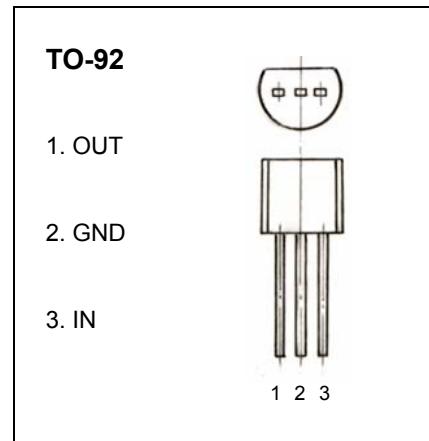 P_D : 0.625W ($T_a=25^\circ C$)**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C







ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=10V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o		25°C	4.8	5.0	5.2
		$7V \leq V_i \leq 20V, I_o = 1mA \sim 40mA$	0-125°C	4.75	5.0	5.25
		$I_o = 1mA \sim 70mA$		4.75	5.0	5.25
Load Regulation	ΔV_o	$I_o = 1mA \sim 100mA$	25°C		15	mV
		$I_o = 1mA \sim 40mA$	25°C		8	mV
Line regulation	ΔV_o	$7V \leq V_i \leq 20V$			32	mV
		$8V \leq V_i \leq 20V$	25°C		26	100
Quiescent Current	I_q		25°C		3.8	6
Quiescent Current Change	ΔI_q	$8V \leq V_i \leq 20V$	0-125°C			1.5
	ΔI_q	$1mA \leq V_i \leq 40mA$	0-125°C			0.1
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$	25°C		42	uV
Ripple Rejection	RR	$8V \leq V_i \leq 20V, f = 120Hz$	0-125°C	41	49	dB
Dropout Voltage	V_d		25°C		1.7	V


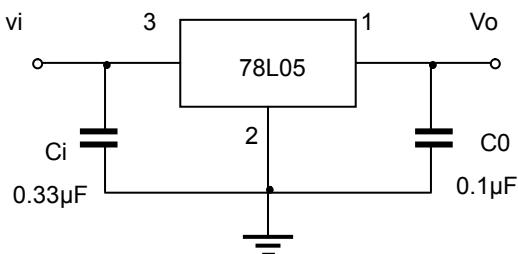
TYPICAL APPLICATION

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

Typical Characteristics

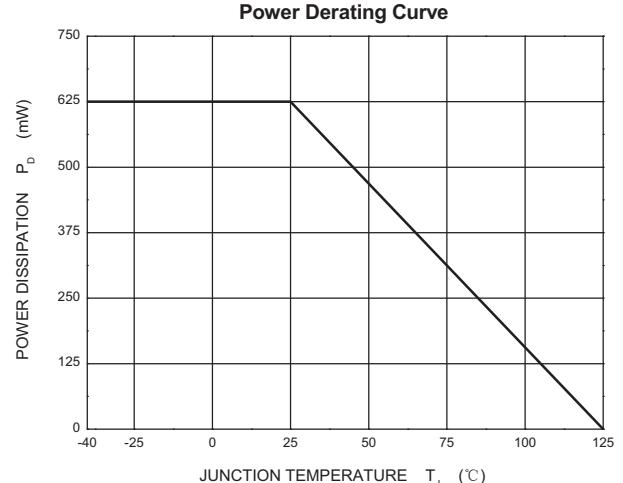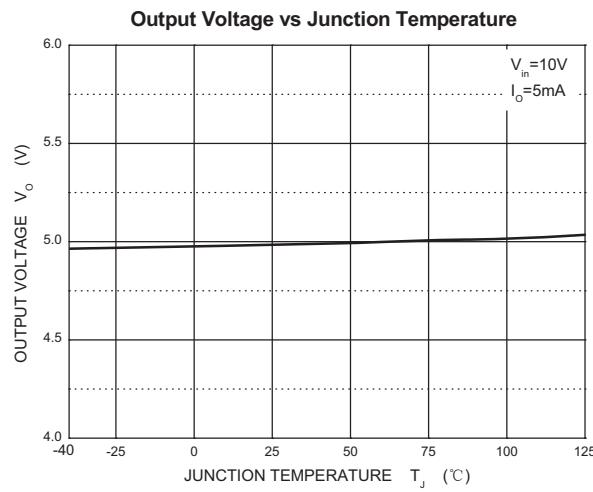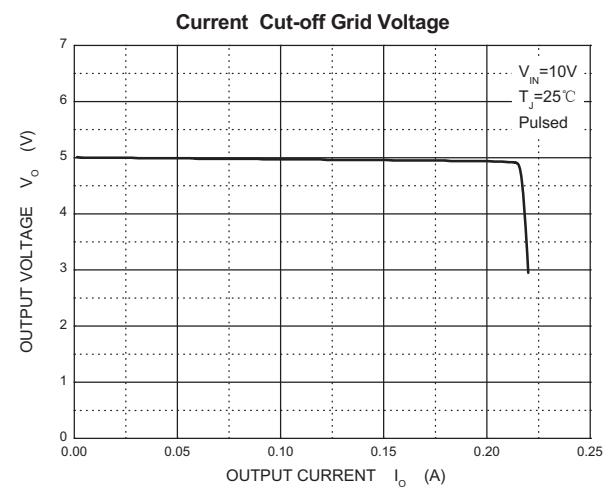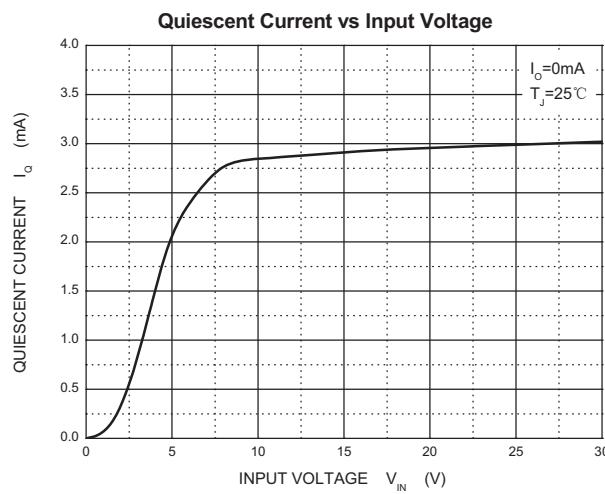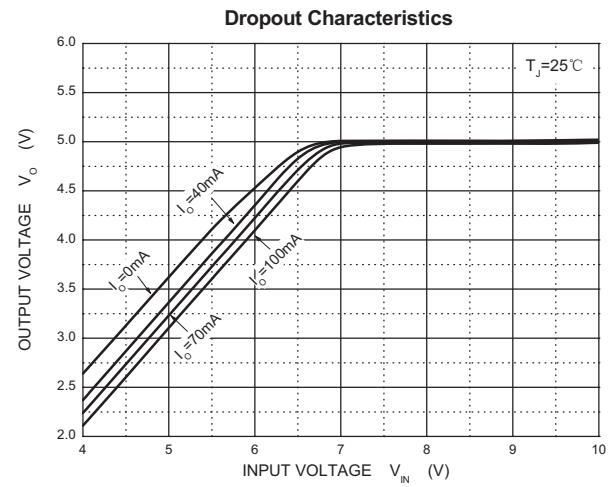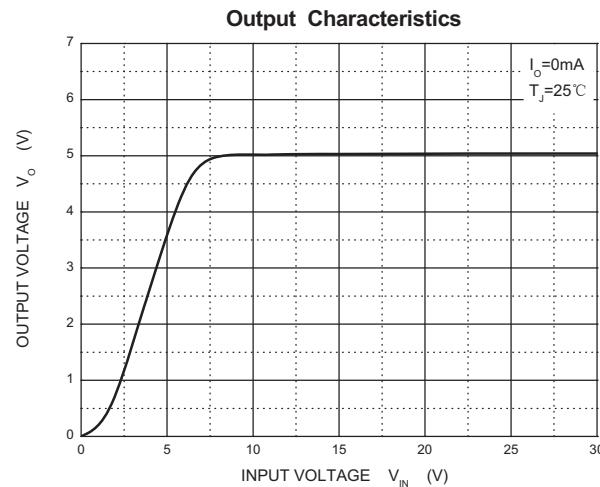


TO-92 Package Outline Dimensions

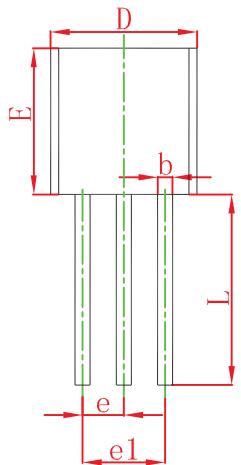

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

TO-92 Suggested Pad Layout

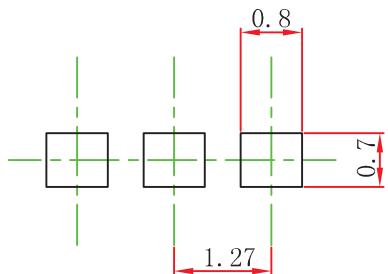

Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.